

Desktop configuration easily converts to wall mount solution



17"



Leverage digital signage



Pull-out SATA HDD

KS7315 / KS7317

Unmatched Fan-Free Performance

Whisper quiet operation

The new KS7300 Series offers a powerful, industry-leading, Intel 1.86GHz Celeron M CPU with 1MB L2 cache. This latest addition to the popular fan-free KS Series family combines optimal performance, low power consumption and heat output with ease of maintenance. The "green" footprint allows companies or divisions to meet corporate mandates related to the deployment of energy saving systems and devices. The KS7300 is available in 15" and 17" resistive or infra red touch options. Both models are configurable to wall mount solutions and are optimized for retail, quick-service, full-service hospitality, grocery and specialized markets.

For more information call (888) 968-1668 today!
www.posiflexusa.com

Key Features:

- Superior fan-free reliability
- Balanced high performance and cost proposition
- Energy saving "green" footprint
- Ruggedized design for harsh environments
- Intel Celeron M 1.86MHz w/ 1MB L2 Cache
- 2GB DDR2 RAM standard
- 80GB SATA HDD
- CF Memory Card (Option)
- 15" and 17" models
- Easily convert to wall mount solutions (bracket sold separately)
- Choice of Microsoft® Windows XP or WEPOS




KS7300 Fan-Free Series

Leaders in POS Terminal Technology

Function	KS7315	KS7317
Processor	Intel Celeron® M - 1.86 GHz (1MB L2 Cache)	
System Memory	DDR2 667MHz SODIMM x 1, max 2GB	
Default Memory	2GB	
Video Memory	Dynamic video memory up to 224MB	
Power Supply	12V DC power adaptor, 80W	
Housing	Aluminum Alloy	
Speaker	Built-in	
Base Stand	Gen 5	Gen 6
OS Support	Microsoft® Win XP Pro / WEPOS	
Safety Certifications	FCC-A, CE-A, RoHS	
Display		
LCD	15" LCD, 1024 x 768 (XGA)	17" LCD, 1280 x 1024 (SXGA)
Touch Sensor	Resistive or Infrared (Special Order)	
Touch Controller	USB or RS232 interface for IR touch	
Brightness Control	Hardware push button switch control or software control	
Tilt Adjustment	From 15° to 70°	
Expansion		
Storage Device	2.5" 80GB HDD SATA HDD in base or 2.5" 80GB SATA HDD in main unit or CF memory card (option)	
Mounting Option	Desktop or wallmount (wallmount bracket sold separately)	
Connectivity		
Audio Port	2 Watt audio amplifier with internal speaker Mic. in/line out ports	
LAN Port	1 x 100 Base-TX / 1000 Base-T Ethernet	
Parallel Port	1 x SPP / EPP / ECP	
Serial Port	4 x DB9, each with +5V power supply	
UPS Port	1 x, battery health auto-check	
Standard USB Port	6 x, USB 2.0, 4 in I/O panel, 2 in side cover	
Proprietary USB Port	1 x, for side mount option such as SD404	
VGA Port	1 x, sub D 3 x 5 pins, RBG analog	
CR Port	1 x, controls 2 cash drawers (max)	
Environment		
Operation Condition	5°C ~ +40°C (41°F ~ +140°F) 20% RH ~ 80%RH, non-condensing max, wet bulb 26°C (78.8°F)	
Storage Condition	20°C ~ +60°C (4°F ~ +140°F) without UPS battery, -20°C ~ +40°C (-4°F ~ +104°F) with UPS battery, 10%RH ~ 80%RH, non-condensing max, wet bulb 28.9°C (84.0°F)	
Options		
2nd HDD	Yes	
2nd LCD Display	LM6000 Series	N/A
Customer Pole Display	<u>Stand Alone</u>	
	PD2200: 11mm, 2x20 VFD display, 5x7 dot matrix, RS232 interface, Adjusted height	
	PD2500: 11mm, 2x20 VFD display, 5x7 dot matrix, RS232 interface, Fixed height	
	PD2602: 9mm, 2x20 VDF display, 5x7 dot matrix, RS232 or USB interface	N/A
PD305: 9mm, 2x20 LCD display, 5x7 dot matrix, RS232 or USB interface		
SD-404 Magnetic Stripe Reader	Optional 2-track or 3-track MSR with/without Finger Print Sensor	
UPS Battery	2.3 Ahr / 12V, in base stand	

Options	
	MSR w/ DigitalPersona Fingerprint Biometrics (for 15" & 17")
	Convenient Connectivity - 2 add'l USB ports and brightness control in covered side panel
	PD305B Customer Display (for 15" only)
	PD2602 Pole Display (for 15" only)
	Stand Alone Pole Display (for 15" & 17")

KS7315 Main Board Interface Diagram

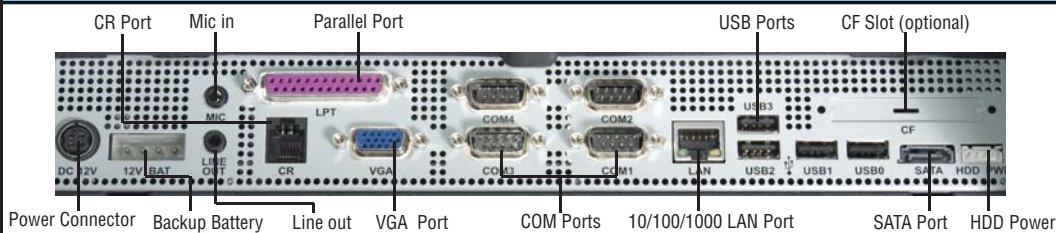

Comprehensive set of legacy ports and leading-edge connectivity to meet almost any application requirement.

About Posiflex

Established in 1984, Posiflex is recognized as a leading provider of innovative Point-of-Service (POS) hardware and platform technology used in diverse markets. Posiflex partners with applications software developers to provide reliable POS terminal systems to the hospitality, healthcare, medical, retail, and specialized markets. The Company's products are sold through industry specialists, value-added resellers and distributors. All products are designed and manufactured in Taipei, Taiwan in two ISO 9001 / 9002 / 14001 certified laboratories and factories. Posiflex USA is located just north of the Silicon Valley, in Hayward, California. For additional information on Posiflex and its diverse product line, visit www.posiflexusa.com or call 888.968.1668

POSIFLEX™
Leaders in POS Terminal Technology

30689 Huntwood Avenue
Hayward, CA 94555
Toll-free: 888.968.1668
Phone: 510.429.7097
Fax: 510.475.0982
e-mail: sales@posiflexusa.com