



# Brownstone Technology Solutions

service | quality | innovation

## BTS-L6035D

### 1/3" Sony Super HAD CCD Super High Resolution Color Dome Camera





Wall Mount



Attach Ceiling Top Plate

- 1/3" Med. Resolution Indoor IR Camera
- 420TVL/ 0Lux (IR LEDs on at 2Lux)
- Built-in 24 IR LEDs
- Illuminating Distance to 15m

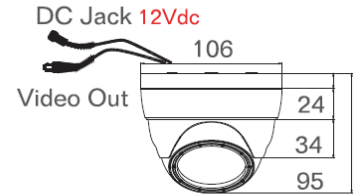

### SPECIFICATIONS

TV Systems	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II	
Number of Total Pixels	795(H) x 596(V)	811(H) x 508(V)
Resolution; DSP	510TVL	
Minimum Illumination	0Lux	
Video Output; Connector	1.0Vp-p Composite, 75Ω; BNC	
Signal to Noise Ratio	More than 48dB	
Gamma Correction	0.45	
Mechanical IR Cut Filter (ICR)	NA	
IR LED, Working Distance	24 Units (IR LEDs on 2<2Lux, IR LEDs off>5Lux); Indoor: 10~15m	
Synchronizing System	INTERNAL	
Automatic Electronic Shutter	Automatic, 1/50(60)sec.~1/100,000sec.	
Automatic Gain Control	Automatic	
Automatic White Balance	Automatic	
Back Light Compensation	NA	
Flickerless	NA	
DNR; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR); Sense Up	
Digital Day & Night Mode	NA	
Automatic IRIS	NA	
Adjustment VR	NA	
Lens Mount	Built-in Board Lens	
Lens, Angle of View (H)	Standard: f4.3mm/F2.0/63°	
Power Supply; Consumption	12Vdc; IR on:3.9W(0.325A) IR off:1.6W(0.130A)	
Operation; Storage Temp.	-10°C~50°C; -20°C~60°C	
Operation; Storage Humidity	Maximum: RH80%; RH90%	
Dimensions	106(DIA)x95(H)mm	
Weight	275g	

\* Specifications subject to change without notice